



Shop Floor

IEI AFOLUX All-in-One Panel PC

15"~19" High Performance Panel PC

Slim, Fanless

AFOLUX Intel® 915 family A series

- Intel® Celeron® M 1.0GHz with 512 KB L2 cache (Fanless)

High Performance

AFOLUX Intel® 915 family B series

- Intel® Pentium® M 2.0GHz (max.)

2008 New !



Medical

Best Choices for High Performance Requirements

AFOLUX panel PC are ideal high-performance platforms for integration into:

- Industrial automation systems
- Medical applications
- Gaming platforms
- Home Automation



Digital Signage



Automation



High Performance 、 Fanless 、 Compact

The performance and features of the AFL-915 series make them suitable for a wide range of high end applications that demand speed and graphics capabilities, including kiosks, telecommunications, graphics intensive medical applications, gaming applications and others.

AFOLUX High Computing Panel PC

- 15"~19" TFT LCD
- Two built-in speakers and one audio line-out extend voice functions for Kiosks, POS and advertising applications
- Built-in Bluetooth module increase peripheral device connections
- Optional GPRS for the best mobile network solution
- Selectable AT/ATX power mode
- IEI exclusive iSMM system management module for system's auto diagnosis
- Watchdog timer with automatic system restart function decreases maintenance costs and suitable for 24-hour service applications
- Fanless design reduces system noise and decreases maintenance expenses caused by fan failures (For AFOLUX 915 A series)
- Resistive touch panel allows users to easily operate the system
- IP 64 front panel protection

Slim, Fanless

AFOLUX Intel® 915 family A series

Intel® Celeron® M 1.0GHz with 512 KB L2 cache

- One DDR2 SO-DIMM 1.0 GB (max.)
- Two DDR2 SO-DIMM 2.0 GB (max.)
- (Operating Temperature :0°C ~ 35°C)

High Performance


AFOLUX Intel® 915 family B series

Intel® Pentium® M 2.0GHz(max.)
-Two DDR2 SO-DIMM 2.0 GB (max.)



Excellent Computational and Multimedia Performance

The high performance Intel® processor offers the best combination of high performance computing features with the lowest power dissipation.

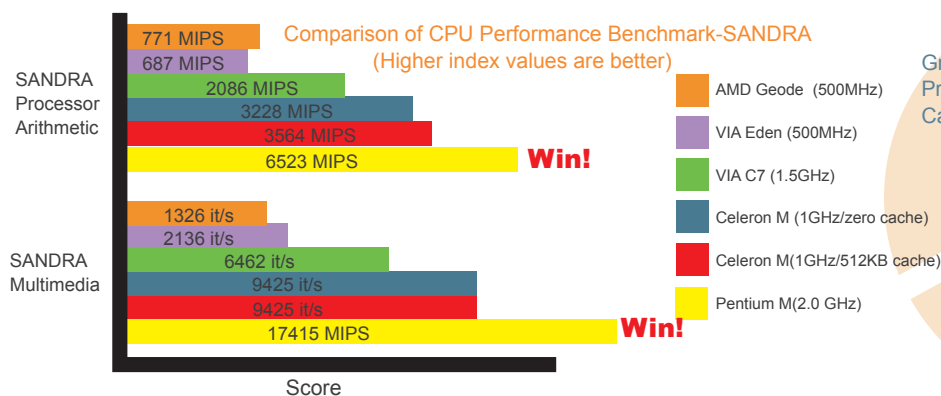

Graphic Processing Capability


Multimedia Processing Capability



Computing Capability

Explore a Wider World of High Computing Applications

Multimedia Entertainment Platform

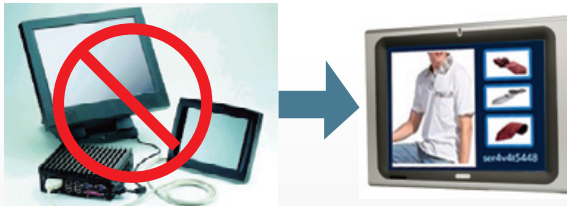

Traditional System

AFOLUX PPC

	Embedded system + monitor	All-in-One Unit
Building cost	High	Low
Maintenance	Complicated	Easy
Appearance	a PC with lots of cables	Simple and Luxury
Space Occupy	High	Low

(1) Stylish Design and built-in Speakers

Stylish and compact unit with two built-in 3W speakers and one audio line-out extend voice functions for Kiosks, POS and advertising applications

(2) Selectable Power Mode

Selecting whether to booting the system in AT or ATX mode enables versatile system control and reduces maintenance costs

(3) Wireless

Data update and transmission by wireless LAN

(4) VESA Mounting Support

VESA mounting design can conveniently mount AFOLUX in any environments

(5) Built-in Bluetooth Module

Bluetooth technology rids systems of cables to create free space and reduce the risk of injury caused by the plugging in of cables to electronic appliances.



Interactive Kiosk



Digital Signage



POS




Gaming

Industrial Computing Platform



Fanless Design
(For AFOLUX Intel® 915 family A series)



(1) Fanless (For AFOLUX Intel® 915 family A series)

Fanless design reduces system noise making it ideal for medical applications.

(2) IP 64 Front Panel Protection

The IP 64 front panel ensures the AFL can operate in harsh environments and that the front panel can easily be kept clean with chemical cleanser

(3) User-friendly and easily accessible platform

(4) Touch Panel Front Screen

Resistive touch panel allows users to easily operate the system

(5) Optional GPRS Module

Mobile data computing via GPRS high-speed packet data technology



Medical Image Terminal



Industrial Automation



Network Security



Transportation

Fully I/O Support


The system supports a wide array of I/O devices for communication with peripherals, networked systems and specialized devices.



• RS-232/422/485 Fast Transmission

Faster! Farther!

- When communicating at high data rates, or over long distances in real world environments, single ended methods are often inadequate. Differential data .
- RS-422 (differential) was designed for greater distances and higher Baud rates than RS-232.
- RS-485 meets the requirements for a truly multi-point communications network, and the standard specifies up to 32 drivers and 32 receivers on a single (2-wire)

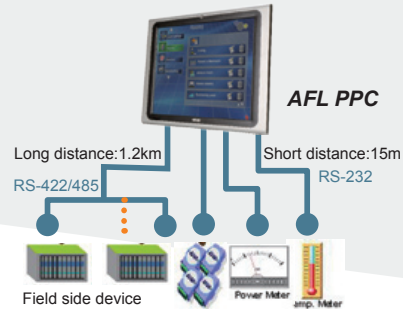


Slim, Fanless

AFOLUX Intel® 915 family A series

- 1 x RS-232, 1 x RS-232/422/485 selectable COM port

- 2 x LAN
- Power Switch

- VGA Out

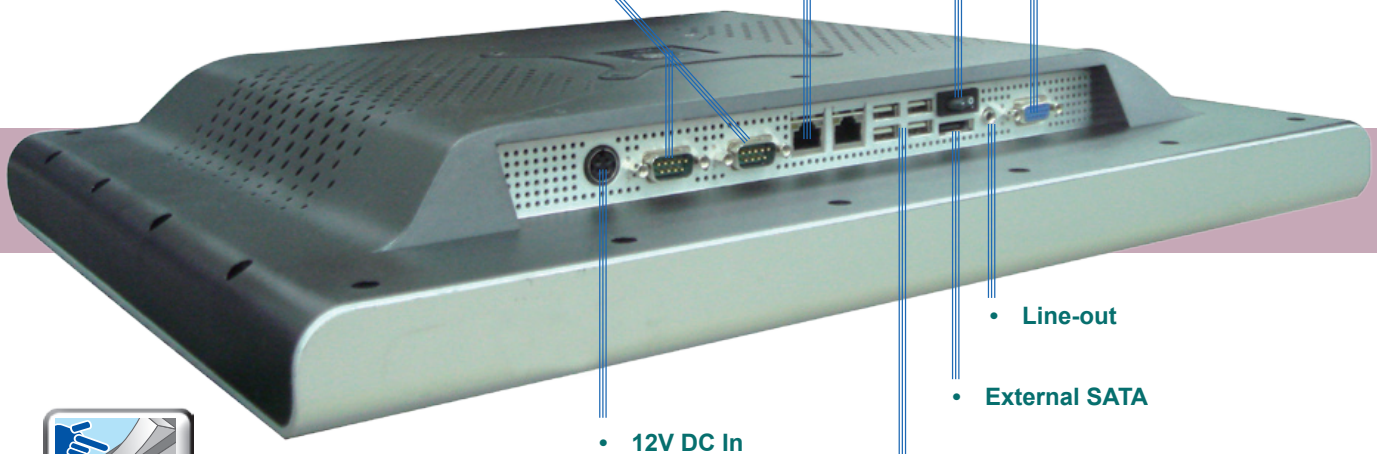

- 12V DC In

- Line-out

- External SATA

- 4 x USB 2.0



• Power Switch:



In AT mode the AFOLUX panel PC automatically starts when the central plug is connected.



System Powered On/Off by Central Plug

Easily Power On/Off in mounting situation
System booted by central plug not individual switch, conveniently used in mounting applications which is difficult to power the system by switch.


Easily boot many systems
Enabling multiple systems through the central power unit.




Wall Mount



Public Information KIOSK



In ATX mode the AFOLUX panel PC can be individually booted via remote network.

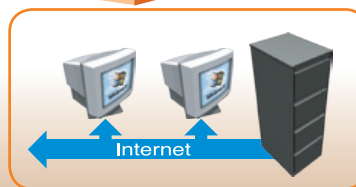

Power Saving

Standby mode activated, when the system is not used.

Remote Control

Users can set up each panel PC to be turned on/off at different time via remote network.

System powered on/off remotely via network



POS



Security Surveillance




- Dual Display by VGA connector



High Performance

AFOLUX Intel® 915 family B series

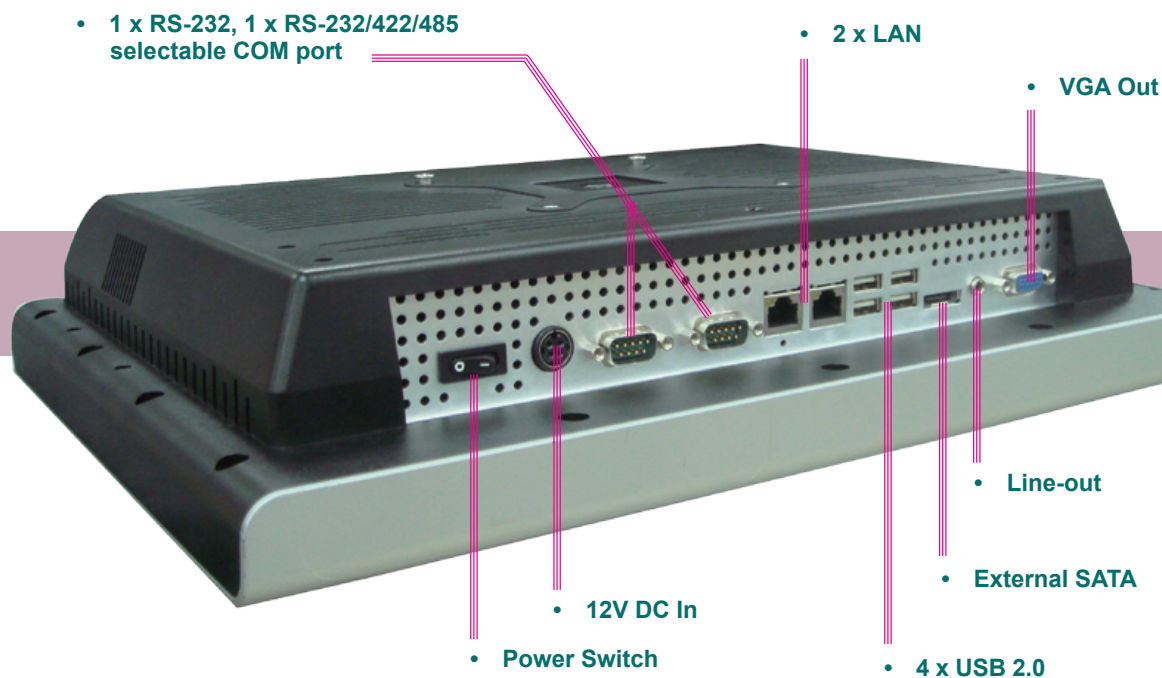

- Dual 10/100/Gigabit Ethernet Support

Allocating factory zone and data storage zone to reduce the network collision and crash or virus infection.



GbE 1

GbE 2



Data Storage
(Security Zone)

Factory
(Hot Zone)

Value-Added Network Connection



A preinstalled bluetooth module communicates with a wide range of electronic products from PDAs, cellphones and printers, to barcode readers.

Connect More!



Headset for gaming device



Cellular phone control and monitoring of logistics service vehicles



Best Control Master

- Better link quality through accurate frequency selection
- High speed transmission advantage through USB 2.0 interface
- Direct communication between WLAN device and Bluetooth device through a collaborative coexisting design
- Performance maximization through data prioritization technology
- High connection efficiency supports both page scan and inquiry scan modes



An optional IEI GPRS module on the AFOLUX all-in-one panel PC enables easier access to the internet through a GSM network allowing web browsing, corporate & internet Email, vehicle positioning, remote LAN access, and document sharing/ collaborative working.


Connect anytime !



Fleet Management



Railway Information System

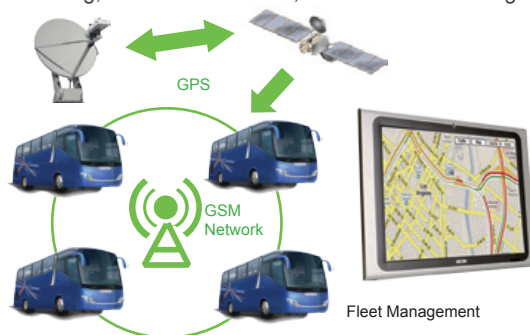

Best Mobile Solution

- Send and receive data in packet transfer mode
- Efficient use of radio bandwidth
- Constant connectivity
- Cost effective



The integrated PIFA antenna on the AFOLUX ensures an uninterrupted wireless connection. PIFA type antennas can receive high-quality, uniform signals in any location from all directions without any signal degradation or impedance and are the most efficient antennas on the market today. PIFA enhances transmission and reception through a special cubic structure to ensure optimum wireless performance.

Connect Reliably !



PIFA antenna inside

Embedded PIFA Antenna



Home Automation

802.11 b/g Compliance for Complete Interoperability


The built-in PIFA antenna for WLAN 802.11b/g, reduces the hazard of network collisions and crashes or virus infections.

Value Added Software

1. Watch Dog Timer



AFOLUX panel PC with reliable watchdog timer (WDT) function which is provided to ensure that standalone systems can always recover from catastrophic conditions that cause the CPU to crash. This condition may have occurred by external EMIs or a software bug. When the CPU stops working correctly, Watchdog Timer either performs a hardware reset (cold boot) or a Non-Maskable Interrupt (NMI) to bring the system back to a known state.

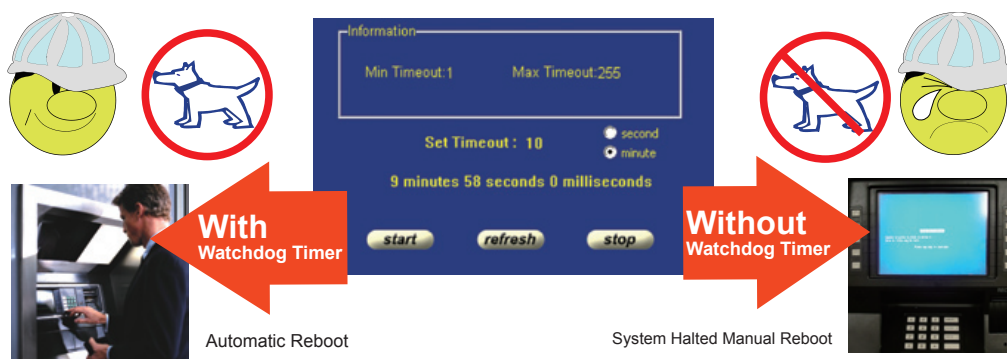

In most cases there is no user around to reset the computer when things go wrong. That job is occupied by the watchdog timer.

Benefits

- Making your service systems more self-reliant
- Decreasing maintenance cost



ATM



KIOSK



Digital Signage



POS


2. Intelligent System Management Module (iSMM)

iSMM

IEI iSMM is a system health supervision API which utilizes sensor chips on IEI motherboards to track system and CPU temperatures, voltages, cooling fan speed., WDT and Digital I/O set up status. By quickly capturing and feedback system health data, users can prevent disasters such as system instability or damage.

Features

- External and on-chip voltages data feedback
- CPU & System temp data feedback
- Cooling fan speed data feedback
- Cooling fan speed controlled by PWM/On-Off/ Automatic Mode
- Warning signals by beeper and sound effect
- WDT Test
- Programmable Digital I/O
- System health configurations save and load

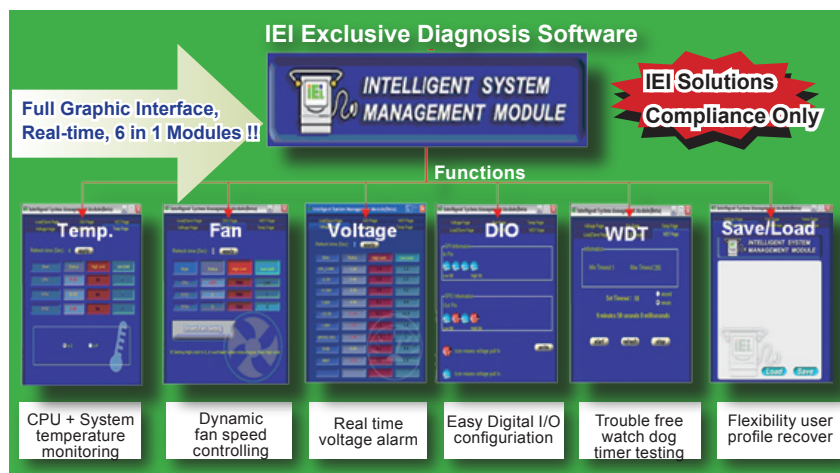

3. Embedded OS Supports

IEI provides optional pre-installed Windows® XP Embedded or Windows® CE 5.0 and CE 6.0 turnkey solutions tailored for the AFOLUX series. These turnkey solutions have one Compact Flash memory card with either Windows® XP Embedded or Windows® CE 5.0 and CE 6.0 with either CE 5.0 or Windows pre-installed, one Windows® XP Embedded or Windows® CE 5.0 license, and one CD that contains all related SDK (Software Development Kit) and user manuals.



AFLCF-15-915-CE050
AFLCF-17-915-CE050
AFLCF-19-915-CE050



AFLCF-15-915-CE060
AFLCF-17-915-CE060
AFLCF-19-915-CE060



AFLCF-15-915-XPE
AFLCF-17-915-XPE
AFLCF-19-915-XPE

128 MB



Include:

- Windows® CE OS image with license
- Thin Client turnkey solutions
- SDK

1 GB



Include:

- Windows® XPE OS image with license
- Thin Client turnkey solutions

Industrial Grade Compliance

Rugged Design

The AFOLUX panel PC are equipped with a drive kit to increase the resistance of the hard drive to shocks and vibrations. The drive kit extends the drive life cycle in environments such as vehicles and marine applications.



IP 64 Front Panel Compliance

The AFOLUX front panel is IP 64 compliant. IP 64 compliance guarantees the front panel is dustproof and water-proof. The AFOLUX front panel can withstand any industrial environment where dust and drizzle is encountered.



IEI Quick Mounting Technology

VESA Mounting Standards


The AFOLUX panel PC series has four mounting holes compliant with the VESA mounting standard (75mm x 75mm/100mm x 100mm) on the rear panel for stand mounting and other mounting methods.

Stands

STAND-A19 supports up to 7.5Kg (for AFL-15A/17A/19A series)

STAND-B19 supports up to 7.2Kg (for AFL-15A/17A/19A series)

Easy Stand

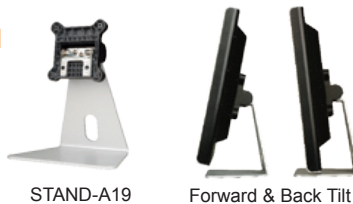

STAND-A19

Forward & Back Tilt

Comfortable Stand



STAND-B19


Portrait/Landscape

Height Adjustment(13 cm)

Right/Left Pan (270°)

Forward & Back Tilt(+25°/-5°)


Panel Mount Kits

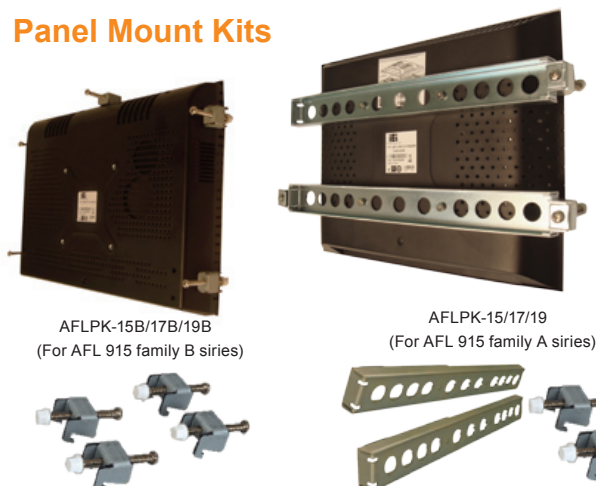

AFLPK-15B/17B/19B
(For AFL 915 family B series)


AFLPK-15/17/19
(For AFL 915 family A series)

Wall Mount Kits

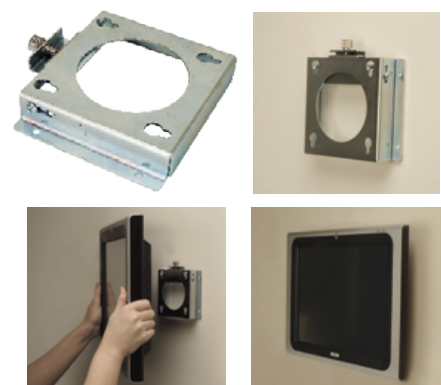


Dimensions (Unit:mm)


AFL-15A

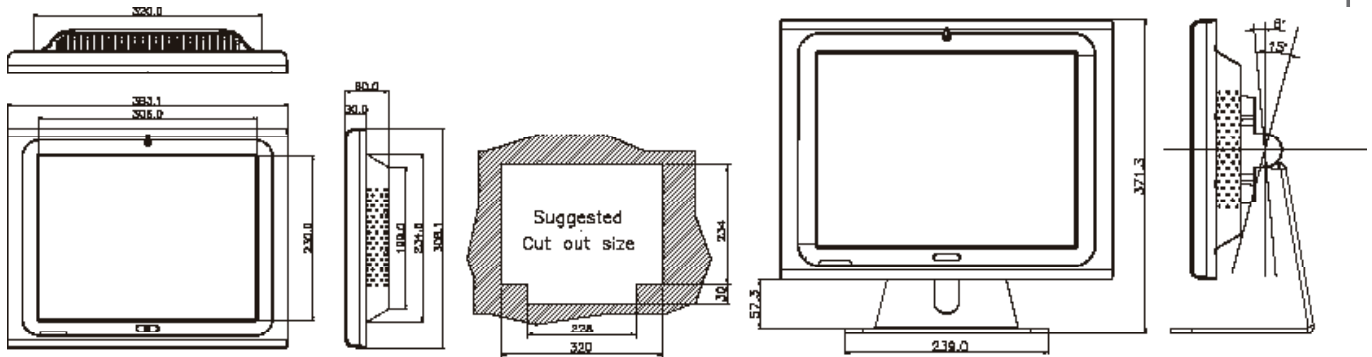

AFL-17A

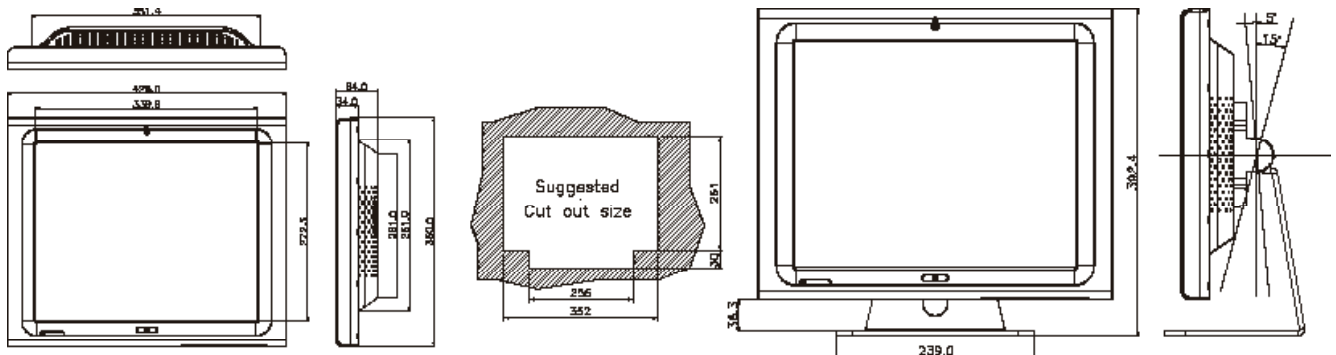


AFL-19A

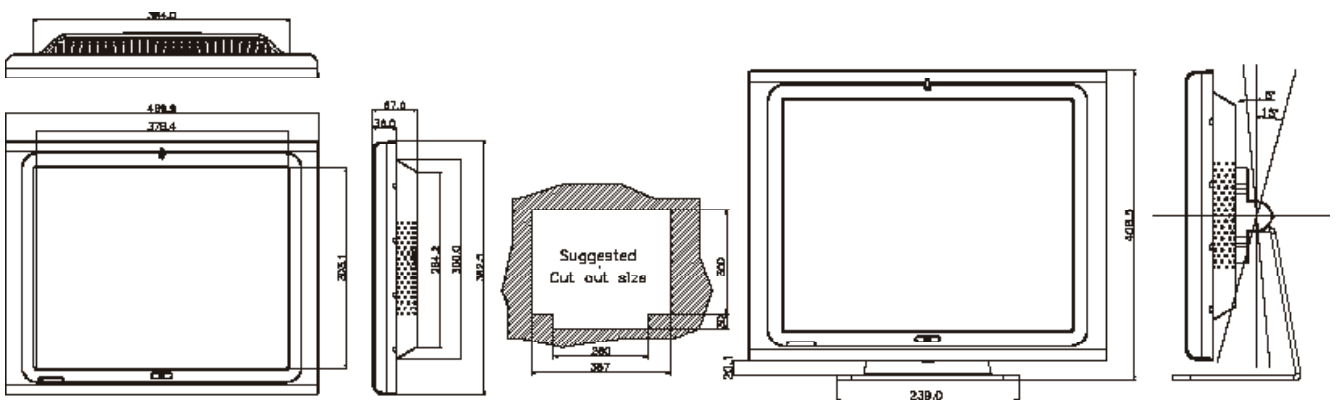


Dimensions (Unit:mm)


AFL-15B

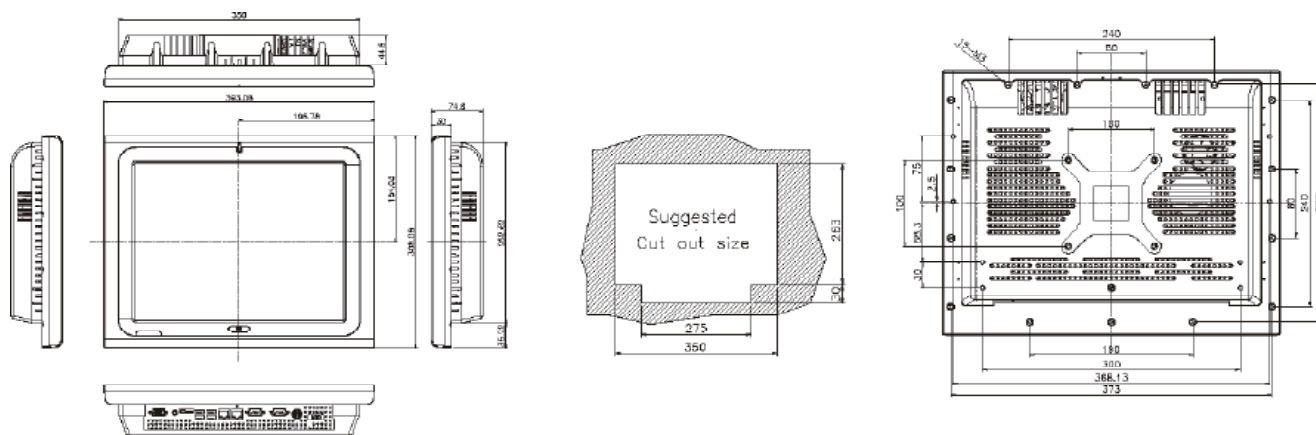

AFL-17B

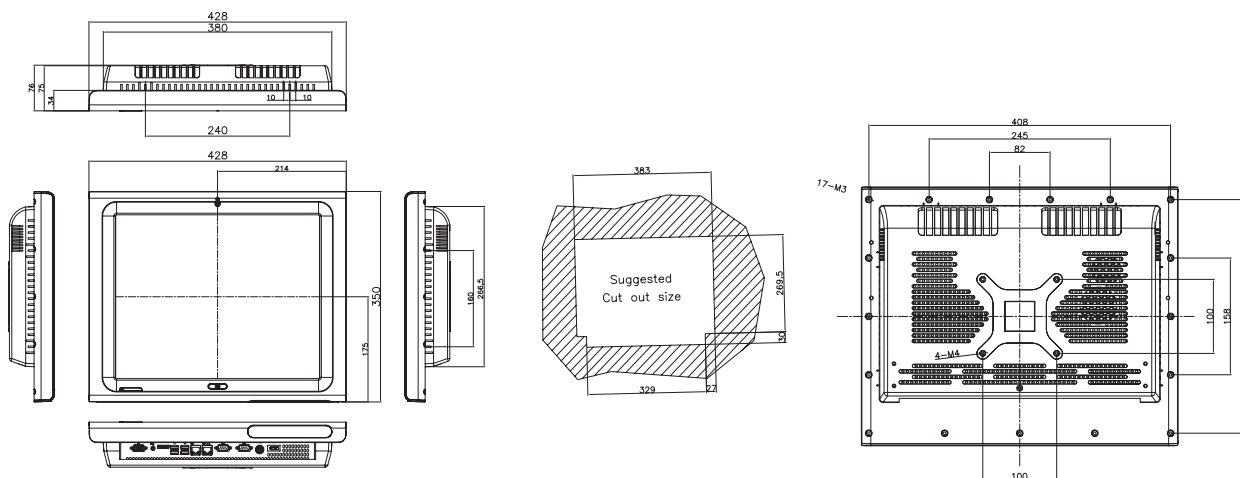

AFL-19B

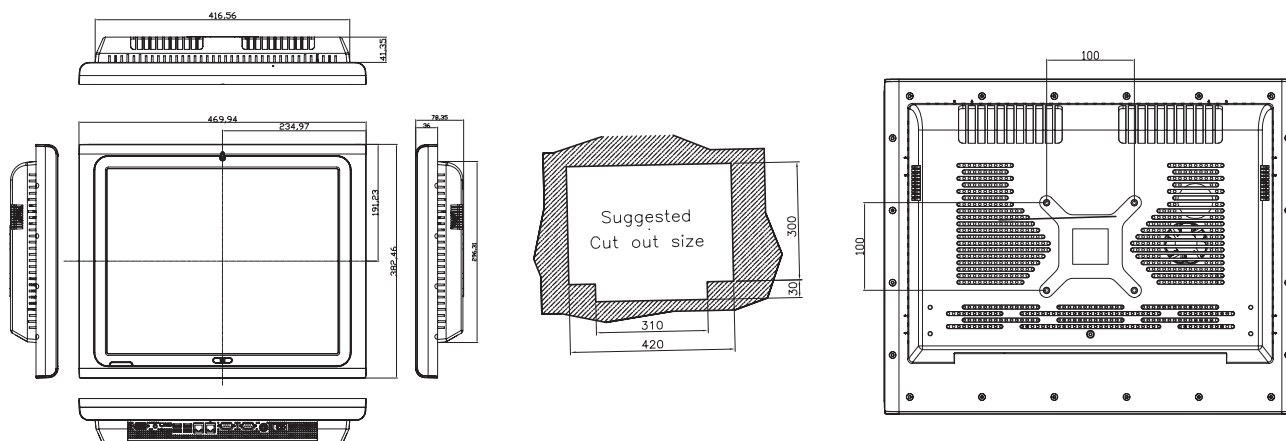


Specifications

	Fanless		Fanless		Fanless	
Model	AFL-15A-915	AFL-15B-915	AFL-17A-915	AFL-17B-915	AFL-19A-915	AFL-19B-915
LCD Size	15"	15"	17"	17"	19"	19"
Max Resolution	1024x768	1024x768	1280 x 1024	1280 x 1024	1280 x 1024	1280 x 1024
Brightness (cd/m2)	350	350	300	300	300	300
Contrast Ratio	700:1	700:1	800:1	800:1	800:1	800:1
LCD Color	262K	262K	16.7M	16.7M	16.7M	16.7M
Pixel Pitch (mm)	0.297(H) x 0.297(V)	0.297(H) x 0.297(V)	0.264(H) x 0.264(V)	0.264(H) x 0.264(V)	0.294(H) x 0.294(V)	0.294(H) x 0.294(V)
Viewing Angle (H-V)	140(H) / 125(V)	140(H) / 125(V)	160(H) / 160(V)	160(H) / 160(V)	160(H) / 160(V)	160(H) / 160(V)
Backlight MTBF	50000	50000	50000	50000	50000	50000
SBC Model	AFLMB-9152-R10	AFLMB-9152-R10	AFLMB-9152-R10	AFLMB-9152-R10	AFLMB-9152-R10	AFLMB-9152-R10
CPU	Intel® Celeron® M (1.0GHz) with 512KB L2 Cache	Intel® Pentium® M Processor (up to 2.0GHz) Intel® Celeron® M processor	Intel® Celeron® M (1.0GHz) with 512KB L2 Cache	Intel® Pentium® M Processor (up to 2.0GHz) Intel® Celeron® M processor	Intel® Celeron® M (1.0GHz) with 512KB L2 Cache	Intel® Pentium® M Processor (up to 2.0GHz) Intel® Celeron® M processor
Chipset	Intel® 915GME/Intel® 910GML	Intel® 915GME	Intel® 915GME/Intel® 910GML	Intel® 915GME	Intel® 915GME/Intel® 910GML	Intel® 915GME
Memory	Supports One DDR2 SO-DIMM 1.0 GB (max.) /Two DDR2 SO-DIMM 2.0 GB (max.)(Operating Temperature :0°C~35°C)	Supports two 200-pin 2GB(maximum) 400MHz or 533MHz DDR2 SO-DIMM	Supports One DDR2 SO-DIMM 1.0 GB (max.) /Two DDR2 SO-DIMM 2.0 GB (max.)(Operating Temperature :0°C~35°C)	Supports two 200-pin 2GB(maximum) 400MHz or 533MHz DDR2 SO-DIMM	Supports One DDR2 SO-DIMM 1.0 GB (max.) /Two DDR2 SO-DIMM 2.0 GB (max.)(Operating Temperature :0°C~35°C)	Supports two 200-pin 2GB(maximum) 400MHz or 533MHz DDR2 SO-DIMM
I/O Ports and Switches	1 x External SATA 1 x RS-232 COM port 1 x RS-232/422/485 COM port 2 x RJ-45 for GbE 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x VGA port 1 x Audio	1 x External SATA 1 x RS-232 COM port 1 x RS-232/422/485 COM port 2 x RJ-45 for GbE 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x VGA port 1 x Audio	1 x External SATA 1 x RS-232 COM port 1 x RS-232/422/485 COM port 2 x RJ-45 for GbE 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x VGA port 1 x Audio	1 x External SATA 1 x RS-232 COM port 1 x RS-232/422/485 COM port 2 x RJ-45 for GbE 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x VGA port 1 x Audio	1 x External SATA 1 x RS-232 COM port 1 x RS-232/422/485 COM port 2 x RJ-45 for GbE 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x VGA port 1 x Audio	1 x External SATA 1 x RS-232 COM port 1 x RS-232/422/485 COM port 2 x RJ-45 for GbE 4 x USB 2.0 1 x Power Switch 1 x Reset Button 1 x VGA port 1 x Audio
SSD	CF Type II	CF Type II	CF Type II	CF Type II	CF Type II	CF Type II
Watchdog Timer	Software Programmable supports 1~255 sec. System reset					
Audio	AMP 1.5W+AMP 1.5W	AMP 3W + AMP 3W	AMP 1.5W+AMP 1.5W	AMP 3W + AMP 3W	AMP 3W+AMP 3W	AMP 3W + AMP 3W
Expansion	1 x Wireless LAN Module (Mini PCIe Interface)	1 x Wireless LAN Module (Mini PCIe Interface)	1 x Wireless LAN Module (Mini PCIe Interface)	1 x Wireless LAN Module (Mini PCIe Interface)	1 x Wireless LAN Module (Mini PCIe Interface)	1 x Wireless LAN Module (Mini PCIe Interface)
HDD Drive Bay	1 x 2.5" SATA HDD bay	1 x 2.5" SATA HDD bay	1 x 2.5" SATA HDD bay	1 x 2.5" SATA HDD bay	1 x 2.5" SATA HDD bay	1 x 2.5" SATA HDD bay
Optional GPRS Module (support GSM 850,EGSM 900,DCS 1800 & PCS1900)	N/A	Yes	N/A	Yes	Yes	Yes
Construction Material	ABS + PC Plastic front frame	ABS + PC Plastic front frame	ABS + PC Plastic front frame	ABS + PC Plastic front frame	ABS + PC Plastic front frame	ABS + PC Plastic front frame
LED Functions	1 x Power ON/OFF LED on front panel	1 x Power ON/OFF LED on front panel	1 x Power ON/OFF LED on front panel	1 x Power ON/OFF LED on front panel	1 x Power ON/OFF LED on front panel	1 x Power ON/OFF LED on front panel
Mounting	Panel, Wall, Rack, Stand and Arm (VESA 100mm x 100mm)	Panel, Wall, Rack, Stand and Arm (VESA 100mm x 100mm)	Panel, Wall, Rack, Stand and Arm (VESA 100mm x 100mm)	Panel, Wall, Rack, Stand and Arm (VESA 100mm x 100mm)	Panel, Wall,Stand and Arm (VESA 100mm x 100mm)	Panel, Wall,Stand and Arm (VESA 100mm x 100mm)
Front Panel Color	Silver	Silver	Silver	Silver	Silver	Silver
Dimension (WxHxD) (mm)	394 x 309 x 61	394 x 309 x 74.6	428 x 350 x 65	428 x 350 x 76	470x 383 x 67	470x 383 x 78.4
Operation Temperature (oC)	0°C~40°C with HDD 0°C~45°C with CF card or SATA interface 2.5"SSD HDD"	0°C~40°C for HDD 0°C~45°C with CF card or SATA interface 2.5" SSD HDD"	0°C~40°C for HDD 00°C~45°C with CF card or SATA interface 2.5" SSD HDD"ard	0°C~40°C for HDD 0°C~45°C with CF card or SATA interface 2.5" SSD HDD"	0°C~40°C for HDD 0°C~45°C with CF card or SATA interface 2.5" SSD HDD"	0°C~40°C for HDD 0°C~45°C with CF card or SATA interface 2.5" SSD HDD"
Storate Temperature (oC)	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C
Net Weight	3.7 Kg	5.8 Kg	5.4 Kg	5.8 Kg	5.8 Kg	6.2 Kg
IP Level (front panel)	IP 64	IP 64	IP 64	IP 64	IP 64	IP 64
EMC	CE,FCC,CCC	CE,FCC,CCC	CE,FCC,CCC	CE,FCC,CCC	CE,FCC,CCC	CE,FCC,CCC
Safety	UL,CB	UL,CB	UL,CB	UL,CB	UL,CB	UL,CB
Touch Screen	Resistive Type 5-Wire(touch controller IC is on board)	Resistive Type 5-Wire(touch controller IC is on board)	Resistive Type 5-Wire(touch controller IC is on board)	Resistive Type 5-Wire(touch controller IC is on board)	Resistive Type 5-Wire(touch controller IC is on board)	Resistive Type 5-Wire(touch controller IC is on board)
Power Adapter	Power: 60W Input: 90VAC~264VAC @ 50/60Hz Output:12VDC	Power: 84W Input: 90VAC~264VAC @ 50/60Hz Output:12VDC	Power: 84W Input: 90VAC~264VAC @ 50/60Hz Output:12VDC	Power: 96W Input: 90VAC~264VAC @ 50/60Hz Output:12VDC	Power: 84W Input: 90VAC~264VAC @ 50/60Hz Output:12VDC	Power: 96W Input: 90VAC~264VAC @ 50/60Hz Output:12VDC
Power Requirement	12VDC	12VDC	12VDC	12VDC	12VDC	12VDC
Power Consumption	43W	63W (Intel® Pentium® M Processor 2.0GHz, 2GB memory, 40G HDD)	63W	80W (Intel® Pentium® M Processor 2.0GHz, 2GB memory, 40G HDD)	68W	82W (Intel® Pentium® M Processor 2.0GHz, 2GB memory, 40G HDD)


Fully Integrated I/O

AFL-15A-915, AFL-17A-915, AFL-19A-915

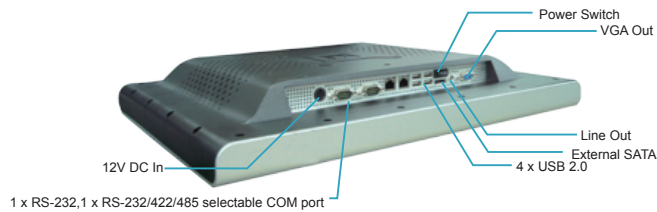

Fully Integrated I/O

AFL-15B-915, AFL-17B-915, AFL-19B-915

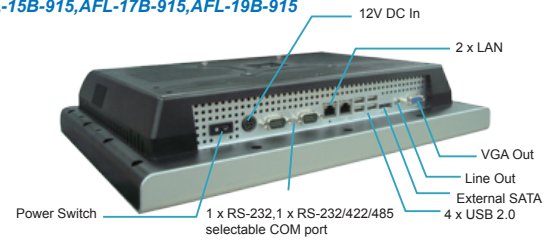

Optional Internal GPRS Spec (P/N: GPRS01)

EDGE/GPRS/GSM Air interface	Quad-band operation GSM850, EGSM 900, DCS 1800, PCS 1900
	GSM Power Class 4 (2W) for 850/900 bands, GSM Power Class 1 (1W) for 1800/1900 bands
	EDGE class E2 (+27dBm in 850/900 bands, +26dBm in 1800/1900 bands)
	GSM/GPRS Rel '97; PCS1900 Rel '98; EGPRS Rel '99 compliant
EGPRS/GPRS (PS) feature set	GPRS Class 10, coding schemes 1-4
	EDGE Class 10, Multi-slot classes 1-9
	GPRS/EGPRS class B type 1 MT
	Link Adaptation
Operating System Supported	Incremental redundancy (IR)
	Windows 2000/XP Home/XP Pro
USB Interface	USB2.0 +5V DC
SIM Card Interface	3.0V interface
Temperature	-30°C to +65°C
Humidity	up to 95% non-condensing
Dimensions	109.3 x 42.7 x 17.7mm

Built-in Bluetooth Spec

(USB 2.0 interface) (P/N:BT01)

Standard	Bluetooth V2.0
Frequency Band	2.402GHz ~ 2.480GHz unlicensed ISM band
Modulation Method	GFSK for 1Mbps; /4-DQPSK for 2Mbps; 8-DPSK for 3Mbps
Spread Spectrum	FHSS (Frequency Hopping Spread Spectrum)
RF Output Power	Class 2 (under 4 dBm)
Antenna terminal	50 Ohms
DC power	DC 3.3 V or DC 5V
I/O interface	USB v2.0 compliant interface
Two GPIO interface	LED link indicator interface
Dimension	35 x 11 mm
Operating system supported	Windows XP, 2000, 98SE, Me

Options

LCD Size	15"	17"	19"
Panel mounting kit	AFLPK-15 (For AFL 915 family A series) AFLPK-15B (For AFL 915 family B series)	AFLPK-17 (For AFL 915 family A series) AFLPK-17B (For AFL 915 family B series)	AFLPK-19 (For AFL 915 family A series) AFLPK-19B (For AFL 915 family B series)
Wall mounting kit	AFLWK-19		
Rack mounting kit	AFLRK-15	AFLRK-17	N/A
LCD Monitor Stand	STAND-A19 / STAND-B19		
OS: WIN CE 5.0	AFLCF-15-915-CE050	AFLCF-17-915-CE050	AFLCF-19-915-CE050
OS: WIN CE 6.0	AFLCF-15-915-CE060	AFLCF-17-915-CE060	AFLCF-19-915-CE060
OS:WIN XPE	AFLCF-15-915-XPE	AFLCF-17-915-XPE	AFLCF-19-915-XPE

* Note: Include-CF card, OS image with WINCE or XPE license and IEI Thin Client software package

* CF card capacity with CE 5.0:128MB, with XPE:1GB

Packing List

1x Power Cable	1x Utility CD	1x Screw Kit
1x Touch Pen	1x Thermal Grease	1x External SATA Cable
1x 84W Power Adapter (for AFL-15B/17A/19A-915 model only)	1x 96W Power Adapter (for AFL-17B/19B-915 model only)	1 x 60W Power Adapter (for AFL-15A-915)

Intel® 915 Family Ordering Information

** : (GPRS0) for optional GPRS module

• CPU BGA Type

Celeron®M 1.0GHz 512K cache

AFL-15A-915-10G/WT-R/512MB	15" XGA panel PC w/ Celeron®M 1.0GHz 512K cache CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS
AFL-17A-915-10G/WT-R/512MB	17" SXGA panel PC w/ Celeron®M 1.0GHz 512K cache CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS
AFL-19A-915-10G/WT-R/512MB/** (GPRS01)	19" SXGA panel PC w/ Celeron®M 1.0GHz 512K cache CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS

• CPU Socket Type

Pentium®M 1.6GHz

AFL-15B-915-16G/WT-R/512MB/** (GPRS01)	15" XGA panel PC w/ Pentium®M 1.6GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS
AFL-17B-915-16G/WT-R/512MB/** (GPRS01)	17" SXGA panel PC w/ Pentium®M 1.6GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS
AFL-19B-915-16G/WT-R/512MB/** (GPRS01)	19" SXGA panel PC w/ Pentium®M 1.6GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS

Celeron®M 1.5GHz

AFL-15B-915-15G/WT-R/512MB/** (GPRS01)	15" XGA panel PC w/ Celeron®M 1.5GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS
AFL-17B-915-15G/WT-R/512MB/** (GPRS01)	17" SXGA panel PC w/ Celeron®M 1.5GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS
AFL-19B-915-15G/WT-R/512MB/** (GPRS01)	19" SXGA panel PC w/ Celeron®M 1.5GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS

Pentium®M 1.8GHz

AFL-15B-915-18G/WT-R/512MB/** (GPRS01)	15" XGA panel PC w/ Pentium®M 1.8GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS
AFL-17B-915-18G/WT-R/512MB/** (GPRS01)	17" SXGA panel PC w/ Pentium®M 1.8GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS
AFL-19B-915-18G/WT-R/512MB/** (GPRS01)	19" SXGA panel PC w/ Pentium®M 1.8GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS

Pentium®M 2.0GHz

AFL-15B-915-20G/WT-R/512MB/** (GPRS01)	15" XGA panel PC w/ Pentium®M 2.0GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS
AFL-17B-915-20G/WT-R/512MB/** (GPRS01)	17" SXGA panel PC w/ Pentium®M 2.0GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS
AFL-19B-915-20G/WT-R/512MB/** (GPRS01)	19" SXGA panel PC w/ Pentium®M 2.0GHz CPU, 512MB DDR2 RAM, 802.11 b/g wireless module, touch screen, Bluetooth, RoHS



Headquarters

IEI Technology Corp.

TEL : +886-2-86916798 FAX : +886-2-66160028
sales@ieiworld.com www.ieiworld.com
No. 29, Zhongxing Rd., Sijhih City, Taipei County, 221, Taiwan

America-United States

IEI Technology USA Corp.

Tel: +1-909-595-2819 Fax: +1-909-595-2816
sales@usa.ieiworld.com www.usa.ieiworld.com
168 University Parkway, Pomona, CA 91768

China

Armorlink SH Corp.

TEL : +86-21-54429000 FAX : +86-21-54429100
sales@ieiworld.com.cn www.ieiworld.com.cn
No.515, Shenfu Road, Minhang District, Shanghai, China